6 D D STATE OF WISCONSIN Ш TYPE 9 POLE 15'- 30' MONOTUBE ARM 9 DEPARTMENT OF TRANSPORTATION Ш APPROVED 8-7a June, 2015 /S/ Ahmet Demirbilek STATE ELECTRICAL ENGINEER Ω FHWA

Type 9 Pole 15'-30' Monotube Arm

References:

Standard Spec 641.3.1.2 for Anchor Rod Tightening
Standard Spec 657.2.2.6 for Bolts and Bolted Connections.
TSDM Monotube Signal Arm and Pole Structures 6-1-11

Bid items associated with this drawing:

ITEM NUMBER	<u>TITLE</u>	<u>UNIT</u>
654.0110	Concrete Base Type 10	EACH
654.0100 - 0199	Concrete Base (type)	EACH
657.1515 - 1530	Install Monotube Arms 15-FT to 30-FT	
658.0110	Traffic Signal Face 3-12 Inch Vertical	EACH
658.0115	Traffic Signal Face 4-12 Inch Vertical	EACH
658.0120	Traffic Signal Face 5-12 Inch Vertical	EACH
658.0215	Backplates Signal Face 3-12	EACH
658.0220	Backplates Signal Face 4-12	EACH
658.0225	Backplates Signal Face 5-12	EACH
658.0412	Pedestrian Signal Face 12-Inch	EACH
658.0416	Pedestrian Signal Face 16-Inch	EACH
658.0500	Pedestrian Push Buttons	EACH
658.0600 - 0629	LED Modules (size) (color) (type)	EACH
658.0630 - 0659	LED Modules Pedestrian Countdown Timer (size)	EACH
658.0660 - 0689	LED Modules Countdown Timer (size)	EACH
658.1100 - 1199	Programmable Traffic Signal Face (size) (vertical or horizontal)	EACH
658.5069	Sign Mounting Hardware (location)	LS

Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

NONE

Other SDDs associated with this drawing:

SDD 9c11 Concrete Base Type 10

SDD 9c13 Concrete Base Type 10 and Type 13 Extension

SDD 12a4 Structure Identification Plaque (Required)

Design Notes:

SDD 9e8, sheet "e" (General Notes and Hardware Details for Type 9, 10, 12 and 13 Poles with Monotube Arms) is required.

Contact Person:

DEPARTMENT OF TRANSPORTATION

/S/ Ahmet Demirbilek

STATE ELECTRICAL ENGINEER

Ω

Ω

APPROVED

FHWA

June, 2015

TYPE 10 POLE
15'- 30' MONOTUBE ARM

Type 10 Pole 15'-30' Monotube Arm

References:

Standard Spec 641.3.1.2 for Anchor Rod Tightening
Standard Spec 657.2.2.6 for Bolts and Bolted Connections.
TSDM Monotube Signal Arm and Pole Structures 6-1-11

Bid items associated with this drawing:

ITEM NUMBER	<u>TITLE</u>	<u>UNIT</u>
654.0110	Concrete Base Type 10	EACH
655.0610	Electrical Wire Lighting 12 AWG	
657.1515 - 1530	Install Monotube Arms 15-FT to 30-FT	
657.1806 - 1815	Install Luminaire Arms Steel 6-FT to 15-FT	EACH
658.0110	Traffic Signal Face 3-12 Inch Vertical	EACH
658.0115	Traffic Signal Face 4-12 Inch Vertical	EACH
658.0120	Traffic Signal Face 5-12 Inch Vertical	EACH
658.0215	Backplates Signal Face 3-12	
658.0220	Backplates Signal Face 4-12	
658.0225	Backplates Signal Face 5-12	EACH
658.0412	Pedestrian Signal Face 12-Inch	EACH
658.0416	Pedestrian Signal Face 16-Inch	EACH
658.0600 - 0629	LED Modules (size) (color) (type)	
658.0630 - 0659	LED Modules Pedestrian Countdown Timer (size)	EACH
658.0660 - 0689	LED Modules Countdown Timer (size)	EACH
658.1100 - 1199	Programmable Traffic Signal Face (size) (vertical or horizontal)	EACH
658.0500	Pedestrian Push Buttons	
658.5069	Signal Mounting Hardware	EACH
659.1100-1199	Luminaries Utility LED (Category)	EACH

Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

NONE

Other SDDs associated with this drawing:

SDD 9c11 Concrete Base Type 10

SDD 9c13 Concrete Base Type 10 and Type 13 Extension

Structure Identification Plaque (Required)

Design Notes:

SDD 9e8, sheet "e" (General Notes and Hardware Details for Type 9, 10, 12 and 13 Poles with Monotube Arms) is required.

Contact Person:

9

Ш

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION APPROVED June, 2015 /S/ Ahmet Demirbilek STATE ELECTRICAL ENGINEER Ω

FHWA

Type 12 Pole 35'-55' Monotube Arm

References:

Standard Spec 641.3.1.2 for Anchor Rod Tightening
Standard Spec 657.2.2.6 for Bolts and Bolted Connections.
TSDM Monotube Signal Arm and Pole Structures 6-1-11

Bid items associated with this drawing:

ITEM NUMBER	<u>TITLE</u>	<u>UNIT</u>
654.0113	Concrete Base Type 13	EACH
657.1535 - 1555	Install Monotube Arms 35-FT to 55-FT	
658.0110	Traffic Signal Face 3-12 Inch Vertical	EACH
658.0115	Traffic Signal Face 4-12 Inch Vertical	EACH
658.0120	Traffic Signal Face 5-12 Inch Vertical	EACH
658.0215	Backplates Signal Face 3-12	EACH
658.0220	Backplates Signal Face 4-12	EACH
658.0225	Backplates Signal Face 5-12	EACH
658.0215 - 0290	Backplates Single Face (# section)(size)	EACH
658.0412	Pedestrian Signal Face 12-Inch	EACH
658.0416	Pedestrian Signal Face 16-Inch	EACH
658.0500	Pedestrian Push Buttons	EACH
658.0600 - 0629	LED Modules (size) (color) (type)	EACH
658.0630 - 0659	LED Modules Pedestrian Countdown Timer (size)	EACH
658.0660 - 0689	LED Modules Countdown Timer (size)	EACH
658.1100 - 1199	Programmable Traffic Signal Face (size) (vertical or horizontal)	
658.5069	Signal Mounting Hardware (location)	LS

Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

NONE

Other SDDs associated with this drawing:

SDD 9c12 Concrete Base Type 13 sheets "a" and "b"

SDD 9c13 Concrete Base Type 10 and Type 13 Extension

SDD 12a4 Structure Identification Plaque (Required)

Design Notes:

SDD 9e8, sheet "e" (General Notes and Hardware Details for Type 9, 10, 12 and 13 Poles with Monotube Arms) is required.

Contact Person:

FHWA

Type 13 Pole 35'-55' Monotube Arm

References:

Standard Spec 641.3.1.2 for Anchor Rod Tightening
Standard Spec 657.2.2.6 for Bolts and Bolted Connections.
TSDM Monotube Signal Arm and Pole Structures 6-1-11

Bid items associated with this drawing:

ITEM NUMBER	<u>TITLE</u>	<u>UNIT</u>
654.0113	Concrete Base Type 13	EACH
655.0610	Electrical Wire Lighting 12 AWG	LF
657.1535 - 1555	Install Monotube Arms 35-FT to 55-FT	
657.1806 - 1815	Install Luminaire Arms Steel 6-FT to 15-FT	
658.0110	Traffic Signal Face 3-12 Inch Vertical	EACH
658.0115	Traffic Signal Face 4-12 Inch Vertical	
658.0120	Traffic Signal Face 5-12 Inch Vertical	
658.0215	Backplates Signal Face 3-12	EACH
658.0220	Backplates Signal Face 4-12	
658.0225	Backplates Signal Face 5-12	EACH
658.0412	Pedestrian Signal Face 12-Inch	EACH
658.0416	Pedestrian Signal Face 16-Inch	
658.0500	Pedestrian Push Buttons	EACH
658.0600 - 0629	LED Modules (size) (color) (type)	
658.0630 - 0659	LED Modules Pedestrian Countdown Timer (size)	EACH
658.0660 - 0689	LED Modules Countdown Timer (size)	EACH
658.1100 - 1199	Programmable Traffic Signal Face (size) (vertical or horizontal)	
658.5069	Signal Mounting Hardware (location)	
659.1100-1199	Luminaries Utility LED (Category)	EACH

Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

NONE

Other SDDs associated with this drawing:

SDD 9c12 Concrete Base Type 13 sheets "a" and "b"

SDD 9c13 Concrete Base Type 10 and Type 13 Extension

SDD 12a4 Structure Identification Plaque (Required)

Design Notes:

SDD 9e8, sheet "e" (General Notes and Hardware Details for Type 9, 10, 12 and 13 Poles with Monotube Arms) is required.

Contact Person:

9E8 sheet e: General Notes and Hardware Details for Type 9, 10, 12 and 13 Poles with Monotube Arms

6'-0"

STRUCTURAL IDENTIFICATION

PLAQUE PLACEMENT

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

POLE TYPES 9 AND 10 ARE FOR ARM LENGTHS 15-FOOT TO 30-FOOT.

POLE TYPES 12 AND 13 ARE FOR ARM LENGTHS 35-FOOT TO 55-FOOT.

MONOTUBE POLE AND ARM SHALL BE GALVANIZED STEEL.

RING-STIFFENED BUILT-UP BOX TYPE OF ATTACHMENT FOR TRAFFIC SIGNAL ARM.

ONE (1) PIECE POLE CONSTRUCTION (NO WELDED POLE SECTIONS).

STANDARD STRAIGHT ARM DESIGN (3 % ± RISE).

SECTION 657, POLES OF THE STANDARD SPECIFICATIONS SHALL APPLY TO THIS DRAWING.

PROVIDE WIREWAY THRU POLE WALL AND ARM CONNECTION PLATES. PROVIDE ROUND, SMOOTH INSIDE SURFACE.

MANUFACTURER'S SUBMITTED POLE DESIGNS AND DRAWINGS SHALL BE SIGNED AND STAMPED BY A REGISTERED PROFESSIONAL ENGINEER AND CERTIFIED AS BEING IN COMPLIANCE WITH THE AASHTO 2013 6TH EDITION AND ALL PERTINENT WISDOT SPECIFICATIONS AND DRAWINGS FOR TRAFFIC AND LIGHTING STRUCTURES AND AS FOLLOWS:

- CATEGORY II FATIGUE LOADS OF GALLOPING, TRUCK GUSTS (AT 45 MPH VEHICLE VELOCITY) AND NATURAL WIND GUSTS FOR DESIGN OF TYPE 9 AND TYPE 10 STRUCTURES.
- CATEGORY I FATIGUE LOADS OF GALLOPING, TRUCK GUSTS (AT 45 MPH VEHICLE VELOCITY) AND NATURAL WIND GUSTS FOR DESIGN OF TYPE 12 AND TYPE 13 STRUCTURES.
- 90 MPH (3-SECOND GUST) WIND SPEED AND A 50 YEAR DESIGN LIFE.

SECURE THE OPENING BELOW THE BASE PLATE WITH STAINLESS STEEL OR GALVANIZED STEEL MESH AND SECURE THE MESH WITH $rac{\pi}{4}$ " S.S. BANDING AROUND THE LEVELING NUTS.

INDENT PRINT (NOMINAL 1/2" HIGH) THE POLE LENGTH AND FIRST TWO LETTERS OF THE MANUFACTURERS NAME ON TWO SIDES OF THE BASE PLATE 180 DEGREES APART, BEFORE GALVANIZING, THE ARM SHALL BE IDENTIFIED WITH THE SAME INFORMATION BY INDENT PRINT.

SIGNAL FACE SHALL BE MOUNTED 6 INCHES (NOMINAL) FROM THE END OF THE MONOTUBE ARM OR AS SHOWN ON THE PLAN CONSTRUCTION DETAIL OR AS DIRECTED BY THE PROJECT ENGINEER/ELECTRICAL OPERATIONS PERSONNEL. MOUNT ALL LIKE HEADS AT SAME ELEVATION.


SIGN MOUNTING BRACKETS SHALL BE FURNISHED IN ACCORDANCE WITH SECTION 637 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION.

- 1 DESIGN FOR MAXIMUM ALLOWABLE HANDHOLE WITH COVER ASSEMBLY WITH TWO 1/4" x 3/4" 20 TPI STAINLESS STEEL HEX HEAD BOLTS.
- SIGNAL MOUNTING BRACKETS FOR POLE MOUNTING, MOUNT WITH CAP SCREW AND BANDING, (SEE SPECIFICATIONS SEC. 658).
- SECURELY MOUNT BACKPLATES, PROJECTING 5" BEYOND ALL SIDES OF THE SIGNAL FACE HOUSING, PER MANUFACTURERS RECOMMENDATIONS.
- (4) THE TOP OF THE POLE SHAFT AND THE END OF THE MONOTUBE ARM SHALL BE EQUIPPED WITH A REMOVABLE, VENTILATED CAP HELD SECURELY IN PLACE WITH SET SCREWS.
- (5) FACTORY-WELDED BRACKET FOR GROUNDING LUG, OPPOSITE HANDHOLE, (LUG AND HARDWARE PAID UNDER SEPARATE ITEM). PROVIDE HOLE IN BRACKET FOR 1/4" X 3/4" - 20 TPI STAINLESS STEEL HEX HEAD BOLT.
- (6) FACTORY-WELDED "J" HOOK FOR STRAIN RELIEF FOR POLE LUMINAIRE WIRE.
- (7) INSTALL STRUCTURAL IDENTIFICATION PLAQUES.

STRUCTURAL IDENTIFICATION PLAQUES SHALL BE PLACED ON THE POLES IN THE SAME DIRECTION AS


MOUNTING HEIGHT SHALL BE 6'-O" ABOVE THE CURB OR SHOULDER. ADJUST IF IT IS KNOWN THAT REQUIRED TRAFFIC SIGNS WILL BE OBSTRUCTED.

(8) FACTORY DRILLED 1/2" DRAIN HOLE 2" FROM FLANGE CONNECTION PLATE.




SIGNAL FACE MOUNTING BRACKET DETAIL FOR MONOTUBE ARM


(MOUNT PER MANUFACTURER'S RECOMMENDATION)



TYPICAL GROUNDING CONNECTIONS NUT. BOLT AND WASHERS SHALL BE STAINLESS STEEL

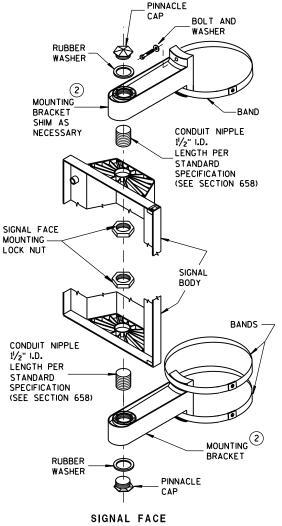

VERTICAL MOUNTING DETAIL



"J" HOOK WIRE SUPPORT

GENERAL NOTES AND HARDWARE **DETAILS FOR TYPE 9, 10, 12 & 13** POLES WITH MONOTUBE ARMS

> STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

ш

Δ

APPROVED STATE ELECTRICAL ENGINEER Version 7

Standard Detail Drawing 9e8 (sheet e)

July 23, 2015

General Notes and Hardware Details for Type 9, 10, 12 and 13 Poles with Monotube Arms

References:

NONE

Bid items associated with this drawing:

<u>ITEM NUMBER</u> <u>TITLE</u> <u>UNIT</u>

NONE

Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

NONE

Other SDDs associated with this drawing:

NONE

Design Notes:

Include this sheet with all pole and monotube combinations in this drawing series (SDD 9e8 Sheets a, b, c, and d).

Contact Person: